


SERIES: VFSD1-SIP | DESCRIPTION: DC-DC CONVERTER
FEATURES

- 1 W isolated output
- industry standard pinout
- unregulated
- single output (5~24 V)
- small footprint
- 3,000 V isolation
- short circuit protection
- temperature range (-40~85°C)
- efficiency up to 81%

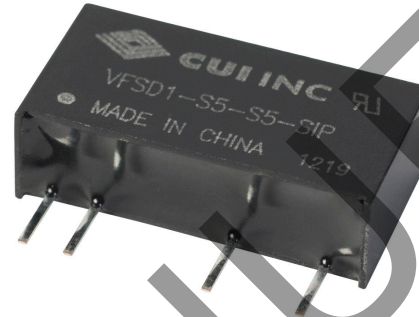

| MODEL | input voltage | | output voltage (Vdc) | output current | | output power max (W) | ripple noise max (mVp-p) | efficiency typ (%) |
|---------------------|---------------|----------------|-------------------------|----------------|-------------|----------------------------|--------------------------------|--------------------------|
| | typ (Vdc) | range (Vdc) | | min (mA) | max (mA) | | | |
| VFSD1-S3.3-S3.3-SIP | 3.3 | 3.0 ~ 3.6 | 3.3 | 31 | 303 | 1 | 100 | 69 |
| VFSD1-S3.3-S5-SIP | 3.3 | 3.0 ~ 3.6 | 5 | 20 | 200 | 1 | 100 | 74 |
| VFSD1-S5-S5-SIP | 5 | 4.5 ~ 5.5 | 5 | 20 | 200 | 1 | 30 | 80 |
| VFSD1-S5-S12-SIP | 5 | 4.5 ~ 5.5 | 12 | 9 | 83 | 1 | 30 | 80 |
| VFSD1-S5-S15-SIP | 5 | 4.5 ~ 5.5 | 15 | 7 | 67 | 1 | 60 | 81 |
| VFSD1-S5-S24-SIP | 5 | 4.5 ~ 5.5 | 24 | 5 | 42 | 1 | 60 | 81 |
| VFSD1-S12-S5-SIP | 12 | 10.8 ~ 13.2 | 5 | 20 | 200 | 1 | 30 | 80 |
| VFSD1-S12-S12-SIP | 12 | 10.8 ~ 13.2 | 12 | 9 | 83 | 1 | 30 | 80 |
| VFSD1-S12-S15-SIP | 12 | 10.8 ~ 13.2 | 15 | 7 | 67 | 1 | 60 | 81 |
| VFSD1-S15-S5-SIP | 15 | 13.5 ~ 16.5 | 5 | 20 | 200 | 1 | 30 | 80 |
| VFSD1-S15-S15-SIP | 15 | 13.5 ~ 16.5 | 15 | 7 | 67 | 1 | 60 | 81 |
| VFSD1-S24-S5-SIP | 24 | 21.6 ~ 26.4 | 5 | 20 | 200 | 1 | 30 | 79 |
| VFSD1-S24-S12-SIP | 24 | 21.6 ~ 26.4 | 12 | 9 | 83 | 1 | 30 | 81 |
| VFSD1-S24-S15-SIP | 24 | 21.6 ~ 26.4 | 15 | 7 | 67 | 1 | 60 | 82 |

Note: 1. Ripple and noise measured at 20 mHz BW

PART NUMBER KEY
VFSD1-S XX -S XX -SIP

Base Number

Input Voltage

Output Voltage

INPUT

| parameter | conditions/description | min | typ | max | units |
|-------------------------|------------------------|------|-----|------|-------|
| operating input voltage | 5 V model | 4.5 | 5 | 5.5 | Vdc |
| | 12 V model | 10.8 | 12 | 13.2 | Vdc |
| | 15 V model | 13.5 | 15 | 16.5 | Vdc |
| | 24 V model | 21.6 | 24 | 26.4 | Vdc |
| input surge voltage | 1 second max. | -0.7 | | 9 | Vdc |
| | | -0.7 | | 18 | Vdc |
| | | -0.7 | | 21 | Vdc |
| | | -0.7 | | 30 | Vdc |
| input filter | C filter | | | | |

OUTPUT

| parameter | conditions/description | min | typ | max | units |
|-------------------------|----------------------------------|------------|-----|------------|-------|
| voltage accuracy | see derating curves | | | | |
| line regulation | for Vin change of $\pm 1\%$ | | | ± 1.2 | % |
| load regulation | 10 ~ 100% full load | 5 V model | 10 | 15 | % |
| | | 12 V model | 8 | 15 | % |
| | | 15 V model | 7 | 15 | % |
| | | 24 V model | 6 | 15 | % |
| switching frequency | 100% load, nominal input voltage | | 100 | 300 | kHz |
| temperature coefficient | 100% load | | | ± 0.03 | %/°C |

PROTECTIONS

| parameter | conditions/description | min | typ | max | units |
|--------------------------|--------------------------------|-----|-----|-----|-------|
| short circuit protection | continuous, automatic recovery | | | | |


SAFETY AND COMPLIANCE

| parameter | conditions/description | min | typ | max | units |
|-----------------------|--|-----------|-----|-----|------------|
| isolation voltage | tested for 1 minute at 1 mA max. | 3,000 | | | Vdc |
| isolation resistance | at 500 Vdc | 1,000 | | | M Ω |
| isolation capacitance | input to output, 100 kHz / 0.1 V | | 20 | | pF |
| EMI/EMC | CISPR22/EN 55022 Class B, IEC/EN 61000-4-2 | | | | |
| RoHS compliant | yes | | | | |
| MTBF | MIL-HDBK-217F, 25°C | 3,500,000 | | | hours |

ENVIRONMENTAL


| parameter | conditions/description | min | typ | max | units |
|-----------------------|-------------------------------------|-----|-----|-----|-------|
| operating temperature | | -40 | | 105 | °C |
| storage temperature | | -55 | | 125 | °C |
| storage humidity | non-condensing | | | 95 | % |
| temperature rise | 100% load | | 25 | | °C |
| lead temperature | 1.5 mm from the case for 10 seconds | | | 300 | °C |

EMC RECOMMENDED CIRCUIT

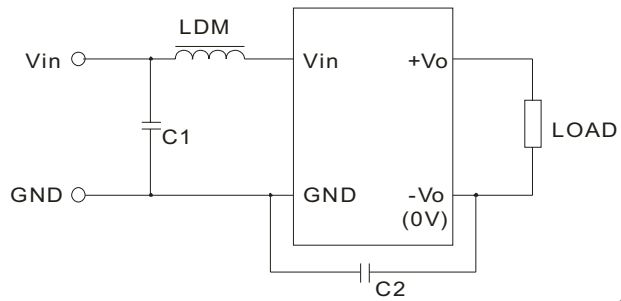

| RECOMMENDED EXTERNAL CIRCUIT PARAMETERS | Vin = 5V | Vin = 12V | Vin = 15V | Vin = 24V |
|---|--------------|-----------|---------------|-----------|
| C1 | 475 k / 50 V | | | |
| LDM | 6.8 μ H | | | |
| C2 | --- | | 470 pF / 2 kV | |

DERATING CURVES


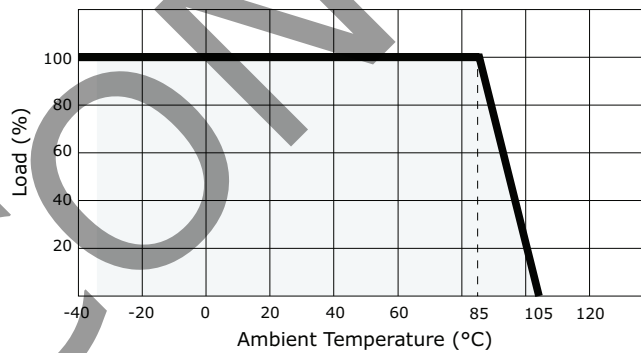


MECHANICAL

| parameter | conditions/description | min | typ | max | units |
|---------------|---|-----|-----|-----|-------|
| dimensions | 0.768 x 0.236 x 0.39 (19.50 x 6.00 x 10.0 mm) | | | | inch |
| case material | Plastic (UL94-V0) | | | | |
| weight | | | 2.4 | | g |

MECHANICAL DRAWING

units: mm [inches]
 tolerance: ± 0.25 [± 0.010]
 pin section tolerance: ± 0.10 mm [± 0.004]

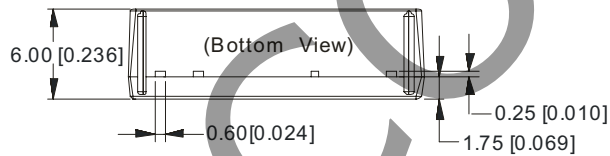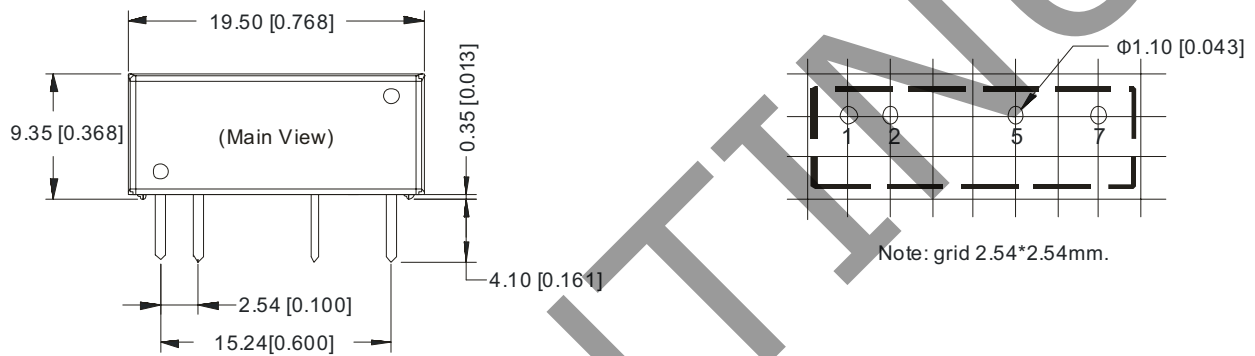

| PIN CONNECTIONS | |
|-----------------|----------|
| PIN | FUNCTION |
| 1 | Vin |
| 2 | GND |
| 5 | 0 V |
| 7 | +Vo |

APPLICATION NOTES

1. Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load could not be less than 10% of the full load. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.


2. Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

3. Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1). It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 1).

Figure 1




External Capacitor Table (Table 1)

| Vin (Vdc) | Cin (μF) | Vout (Vdc) | Cout (μF) |
|-----------|----------|------------|-----------|
| 5 | 4.7 | 5 | 10 |
| 12 | 2.2 | 9.0 | 4.7 |
| 15 | 2.2 | 12 | 2.2 |
| 24 | 1.0 | 15, 24 | 1.0 |

4. Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

Figure 2



5. No parallel connection or plug and play

REVISION HISTORY

| rev. | description | date |
|------|-----------------------------|------------|
| 1.0 | initial release | 10/04/2007 |
| 1.01 | updated drawings and data | 05/31/2012 |
| 1.02 | V-Infinity branding removed | 09/05/2012 |
| 1.03 | added 2 models to datasheet | 01/28/2013 |

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.